


Flex Pipe

Mounting Instruction




Use Dinex FlexFit clamps together with exhaust sealing paste to minimize leakage of exhaust gas.

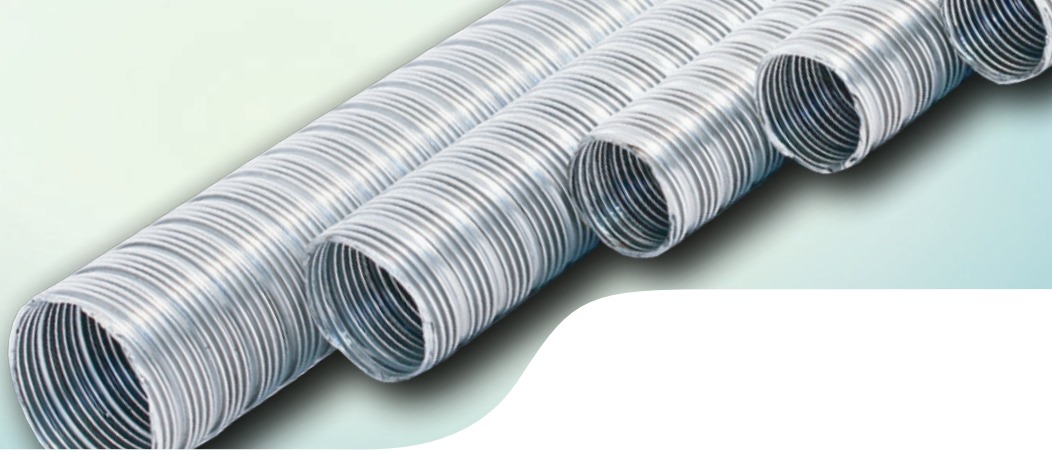


Please make spot welding after cutting the flex pipe to avoid the flex pipe loosening up.



Apply exhaust sealing paste inside the Dinex FlexFit clamp to minimize the leakage of exhaust gas.

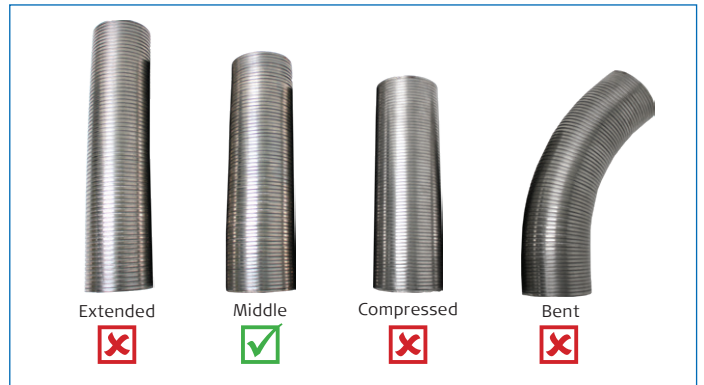

The flex pipe must be in middle position for correct mounting.

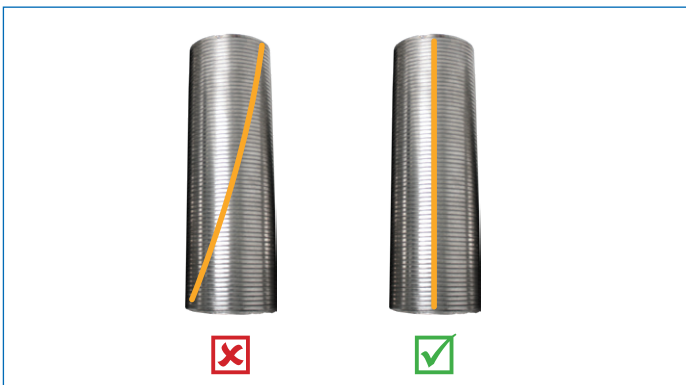

The flex pipe should not be twisted or bent.